



DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO. M-10634
This Certificate consists of 3 pages

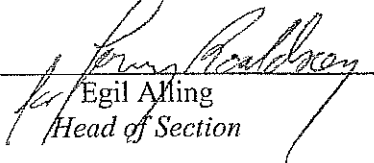
This is to certify that the
Pourable Compound for Foundation Chocking
with type designations
Chockfast Orange PR 610 TCF.

Manufactured by
ITW Polymer Technologies Inc.
Montgomeryville, PA 18936, United States

is found to comply with
Det Norske Veritas' Rules for Classification of Ships/High Speed and Light Craft

Application
The approval is valid for foundation chocking of diesel engines, reduction gears, thrust bearings, rudder actuators and other auxiliary machinery.

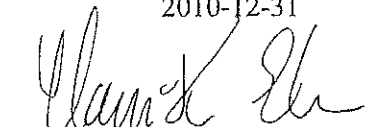
Place and date
Høvik, 2007-01-08
for DET NORSKE VERITAS AS


Egil Aalling
Head of Section



Local Office
DNV New York

This Certificate is valid until
2010-12-31


Hans-Kristian Eriksen
Surveyor

Notice: This Certificate is subject to terms and conditions overleaf. Any significant change in design or construction may render this Certificate invalid.
The validity date relates to the Type Approval Certificate and not to the approval of equipment/systems installed.

If any person suffers loss or damage which is proved to have been caused by any negligent act or omission of Det Norske Veritas, then Det Norske Veritas shall pay compensation to such person for his proved direct loss or damage. However, the compensation shall not exceed an amount equal to ten times the fee charged for the service in question, provided that the maximum compensation shall never exceed USD 2 million. In this provision "Det Norske Veritas" shall mean the Foundation Det Norske Veritas as well as all its subsidiaries, directors, officers, employees, agents and any other acting on behalf of Det Norske Veritas.



Cert. No.: M-10634

File No.: 702.72

Product description

Epoxy based resin.

Application/Limitation

The approval is valid for foundation chocking of diesel engines, reduction gears, thrust bearings, rudder actuators, sterntubes and other auxiliary machinery.

The permitted chock stress is in accordance with Philadelphia Resins Corp. Chart I PRC 5.5.86, which include the following pressure/temperature relations:

Max. service temp. (deg. C):	90	80	70	60
Max. tot. surf. press. (N/mm ²):	2.3	4.4	5.9	7.0
Max. service temp. (deg. C):	50	40	30	20
Max. tot. surf. press. (N/mm ²):	8.0	8.7	9.4	10.0

Max. specific load due to weight: 0.9 N/mm².

The approval is also valid for offshore use with reference to DNV Offshore Service Specification DNV-OSS-101.

Type Approval documentation

Philadelphia Resins Corp. CHART I PRC 5.5.86 and letters of 19.6.86, 21.8.86 from Philadelphia Resins Corporation and Technical Bulletin No. 632C Chockfast Installation Guidelines for Sterntubes.

Marking of product

The product to be marked with manufacturer's name or trademark and type number identification.

Certificate retention survey

For retention of the Type Approval, a DNV surveyor shall perform survey every second year and before expiry date of this certificate to verify that the conditions of the type approval is complied with.



Cert. No.: M-10634

File No.: 702.72

Other conditions

Chocking plan with boltstress-calculation to be submitted for approval in each particular case.

The tightening -up of engine and reduction gear holding down bolts, controlled at installation, is to be checked after trial trip when cooled down. Information about this is to be given at the delivery of the compound

The manufacturer's instructions to casting and curing of the compound are to be followed.

After hardening of the chocks and prior to tightening of the holding-down bolts a Barcol hardness test has to be performed with a result of at least 24.

END OF CERTIFICATE